

SWIRL EFFECTS ON DYNAMICS CHARACTERISTICS OF A COAXIAL JET

M. A. MERGHENI^{1,2}, Z. RIAHI³, J. C. SAUTET², S. BEN NASRALLAH²

*¹CORIA UMR 6614 CNRS --Université et INSA de ROUEN,
Avenue de l'Université, BP 12, 76801 Saint Etienne du Rouvray, Cedex, France*

²LESTE, Ecole Nationale d'Ingénieurs de Monastir, 5019 Monastir, Tunisie

*³Centre de Recherches et des Technologies de l'Energie Borj Cedria,
BP 95 Hammam-Lif 2050, Tunisie*

Mohamed-ali.mergheni@coria.fr

The reactants are generally injected into the industrial furnaces by jets. An effective method to act on combustion in such systems is to control the way injection jets. The present study concerns the control of an air flow generated through a coaxial burner. The effects of passive control on a turbulent flow were investigated experimentally. The principal idea consists in adding small obstacles on the outlet side of the burner's annular jet with an aim of increasing the turbulence intensity in the vicinity close to the edge of injection and of having an act on the central flow.

The objective of this study consists to study of a swirling flow in a circular pipe and conceiving of a control system significantly improving the mixture on a nonreactive flow in order to apply it to a reactive situation. The various profiles speed for various values of the air flow injected into the annular tube will be presented in order to propose the effectiveness of our inspecting device in terms of improvement of the mixture between the two jets as well as the mixture with the ambient air. The Particle Image Velocimetry (PIV) technique has been used to characterize the dynamic field. Results show that the control by adding small obstacles has a considerable effect on the dynamic behavior.

Keywords: swirl coaxial burner, turbulent flow, passive control, PIV.

1. Introduction

Coaxial jets are widely used in industrial applications as an effective way of mixing two different fluid streams, especially in chemical engineering systems and combustion devices. A coaxial jet is made when a fluid stream with velocity U_e , issuing from an outer annulus of diameter D_e , is added into a round jet flow with velocity U_i , and (inner) nozzle diameter D_i ($D_i < D_e$). The existence of two (inner and outer) shear layer regions was evidenced by Ko and co-workers [1, 2, 3] in coaxial jets.

Swirling flow burners are not only used in gas turbines, but also in industrial furnaces because of their significant beneficial influences on flame stability, local mixing and pollutant emissions as the NO_x [4,5,6]

The perpendicular arrangement of tube actuators at the periphery of a main jet can confer a helical movement on the flow. This kind of swirl actuators has very significant effects on the flow. Faivre and Poinso indicated that radial fluid injection into the main jet enhances mixing with the surrounding air. Boushaki show that the addition of swirl significantly changes the aerodynamic pattern and can be opens interesting possibilities in NO_x reduction and modularity of flame properties such as the lift-off height and the flame length.

According to the burner geometry, the flame falls apart of the injection edge in some devices. This behavior is called "Lift-off". Also, some instabilities appear for which the installations are not always initially designed, and this in an increasing need to produce more or to pollute less. These instabilities are the noise, the vibrations and the destruction partial or total of the burner.

All these phenomena are naturally undesirable on an industrial system, also it is important to be able to remove or control instabilities of combustion. The control of combustion becomes then a priority, not only to avoid the appearance of combustion instabilities but also to improve reactants mixture, to ensure the stabilization of the flame and to reduce the polluting emissions [8,9,10].

However, in many applications, the physical characteristics of the flow (composition, capacity PCI...) can strongly vary. It thus becomes delicate to keep the stable mode of operation and this is why it is necessary to seek a solution on the side of the instabilities control [11].

According to the industrial application, we can control a jet to improve the mixture at exit of an injector, also to direct it, decrease the pollution emission or even sound pollution.

In general, there are two main roads in the flow control: passive or active control. Passive control consists in changing the geometry of the burner or the furnace which affects the dynamics of the flow. Active control consists of an external contribution of energy through actuators while keeping the same device geometry [12,13].

Nevertheless, the study of the aerodynamic behaviour of coaxial jets is of great interest from both a scientific and a practical point of view. Indeed, the characterization and, possibly, the control of the mixing between the streams of coaxial jet configuration is a primary design feature in many industrial applications, as, for instance, in the design of new-generation industrial burners. Therefore, research activities aimed at an increased understanding of the

relative influence of the various parameters on the near-field development are in any case highly needed.

This study has as an aim the dynamics of the flows generated by coaxial jets. In order to obtain a better definition and, possibly a deeper physical understanding of the flow control of a coaxial jet configuration, we put on the outlet side of the annular tube small obstacles which will create axial vorticity and thus will improve the mixture. This work consists in making a control device on a nonreactive flow in order to apply it to a reactive situation. We'll study an air flow in a coaxial burner.

The inventory of the swirling structures is first of all carried out with assistance of visualizations by Particles Image Velocity (PIV). Then, the profiles speeds are raised more close possible of the tail pipe of the jets. The results obtained are compared and discussed. The taking into account of profiles speeds directly resulting from the experiments as basic solution for later calculations of stability constitutes the objective of this approach.

2. Experimental setup

2.1. Burner and experimental description

The experimental device consists in generating two coaxial jets in the ambient air. A schematic of the coaxial-jet burner apparatus is shown in Fig. 1. The burner is composed of an internal tube of diameter $D_i = 6 \text{ mm}$ with exit velocity (U_i) and of an annular tube of external diameter $D_e = 18 \text{ mm}$ with exit velocity (U_e) bringing of both of them the air. The internal tube is chamfered on its external part. The air oxygen comes from the network with pressure P of 8 bars. The flow of the annular jet is controlled $m = U_i/U_e$. The coaxial jet is directed vertically down ward, the vertical jet flow discharges in still ambient air. The stream wise direction is the x -axis and the radial direction is the r -axis. The Reynolds number Re is defined as: $Re_i = \rho U_i D_i / \mu$, where $\rho = 1.14 \text{ kg/m}^3$ is the air density, $\mu = 1.86 \cdot 10^{-5} \text{ N.s/m}^2$ is the dynamic viscosity

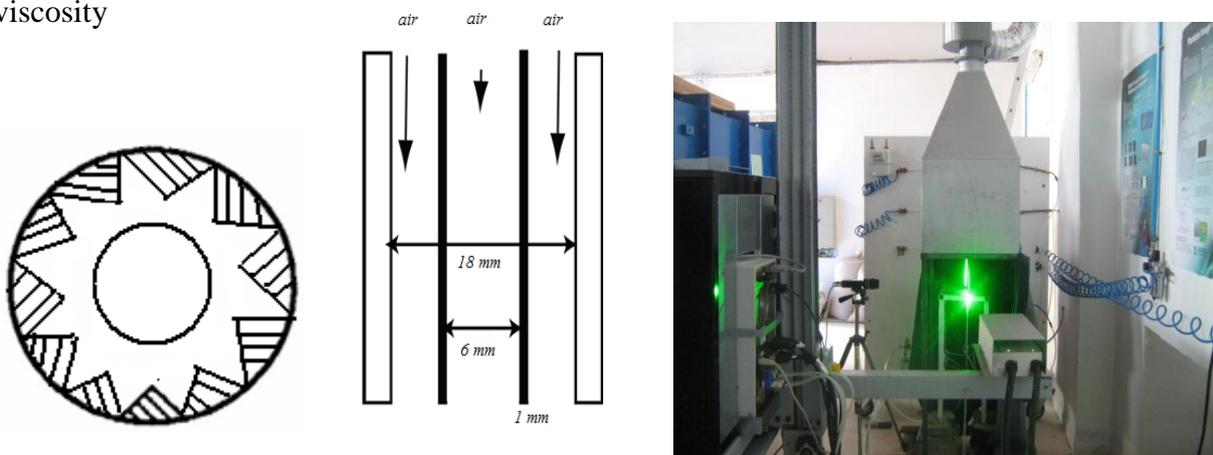


Fig.1: Schematic of burner apparatus and the top sight of the burner

	U _i (m/s)	U _e (m/s)	Re _e	m=U _i /U _e
Flow (I)	35	7.77	5714	4,5
Flow (II)	35	14	10296	2,5
Flow (III)	35	25	18387	1,4

Table 1. Central and annular air flows characteristics, included exit velocity, Reynolds number and velocity ratio m

This control consists in modifying the geometry of the injector in order to improve the performances of the burner used and to reduce instabilities of the flow. It seemed to us interesting to study the configuration of an angular injector. With this intention, we added small obstacles of triangular form on the outlet side of the annular tube. We will study thereafter the effect of these modifications on our flow. The experimental tests consist in fixing the velocity of the central jet and to vary each time the velocity of the annular jet and to characterize the effect of control on the flow for various air flows injected into the annular tube.

The Swirl number is a dimensionless quantity characterizing the rotating flow. It is defined as [4]: $S = G_\phi / R \cdot S_x$

Where G_ϕ is the axial flux of the tangential momentum, S_x is the axial flux of axial momentum and R is the exit radius of the burner nozzle.

The geometrical swirl number related to this configuration is defined as [7]:

$$S = \frac{1}{1-\omega} \left(\frac{1}{2} \right)^{1-\left(\frac{R_h}{R}\right)^4} \tan \alpha$$

Where Ψ is the blockage factor, R_h is the swirl external radius R is the a swirl external radius and α is the angle. Values of these geometric parameters are summarized in table 2.

S=0.73	R(mm)	R _h (mm)	α	Ψ
	8	3,8	45	0.17

Table 2. Geometric data of the swirl generator

2.2. Measurement techniques

The experimental device for the PIV measurement requires the basic elements used in laser tomography: a laser sheet which clarifies the zone of studied flow, a camera CCD and a PC of acquisition and control of equipments (Fig.2).

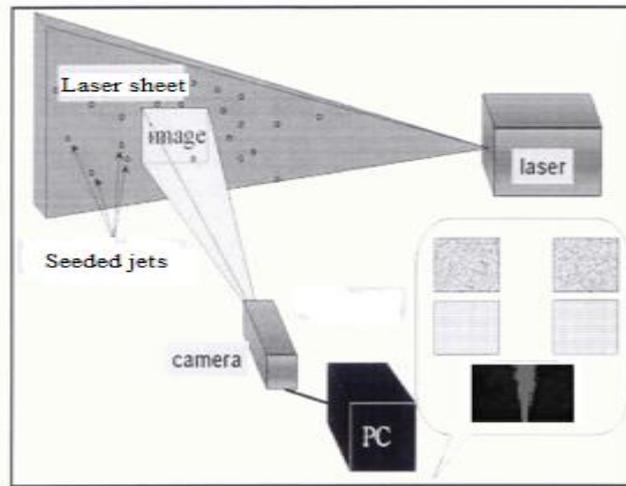


Fig. 2. Schematic of experimental model

The laser used is Nd-YAG Dual Power of 532 nm wavelength and 15 Hz frequency. The laser sheet is formed by a first divergent cylinder lens, which spreads out the beam then by second convergent spherical lens, which refines the sheet. The signal of Mie scattering emitted by particles is collected by a camera, having a dynamics of 10 and 8 bits and a resolution of 1600*1200 pixels. It is associated to an objective of Nikkor mark, focal distance 60 mm, and opening 2.8. The images are stored in real-time on a PC. The synchronization of both pulsate laser and the opening of the camera are carried out by the software Flow Manager. Time between pulsate is of 5 μ s.

For the seeding of jets, we used olive oil particles of 3 to 4 μ m of size for cold measurements. These particles are easy to produce, and have the property not to agglomerate too much, to settle on the walls of the burner and can be well mixed in the flow because of their small size. The production of the particles is ensured by two fluid atomizers of tracer fluid. Visualizations were carried out in the longitudinal plan parallel with the plan of the jets. A classical image processing was used to determine the dynamic fields of the flow. The calculation of image cross-correlation is carried out by the Flow Manager. It is necessary to carry out a post processing to detect and correct the aberrant vectors appeared in the cross-correlation calculation.

3. Results and discussion

3.1. Characterization of the uncontrolled flow

The study of the uncontrolled flow, for which the geometry of the coaxial burner is simple, is an indispensable prerequisite for the analysis of the effects of control. Indeed, from

the experimental point of view, this configuration is a priori the only way a comparison with results from the literature. And to characterize the effect of the control device to the flow, it is obviously necessary to characterize the latter when the control is disabled.

The experimental study of a free jet is a database in light of a comparison with the experimental results of the coaxial configuration as that in which the flow is controlled (Fig. 3.).

The two preceding figures respectively show the photograph of the flow through a free jet obtained by PIV and the axial velocity profile for a height above the burner outlet $y = 5$ mm that is to say in the close proximity of the injection zone.

In this section, the flow is studied in a jet powered by a 6 mm diameter tube, with a mass flow of 1.23 g / s. an average speed of about 35 m / s. the Reynolds number for this flow, based on the diameter of the tube is about 11290.

Note that in the close vicinity of the injection edge, the flow is well organized and opens slightly; when increasing more and more the height along the axis of flow, the latter has small vortices in the mixing region with the ambient air. This aspect of the flow can be justified by the dissipation of kinetic energy of the structures that constitute the flow to the ambient air.

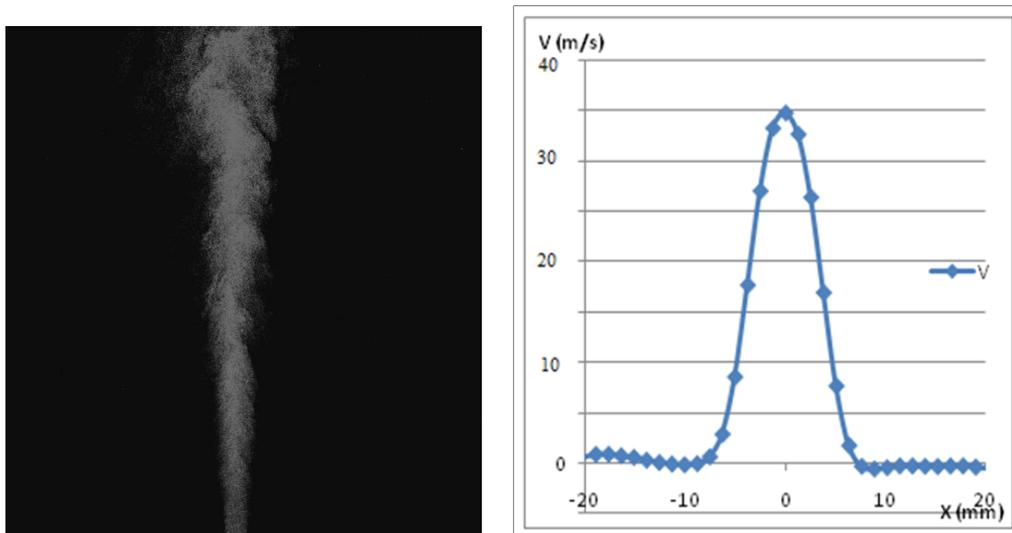



Fig.3: Scheme of the PIV setup

3.2. Characterization of the flow without control

Fig.4 presents instantaneous images of laser tomography for the flow fractions $m=U_i/U_e$ in non reactive flow. The structure evolution of the flow when the ratio velocities of

injection of the principal flow by the annular one (m) vary, shows that according to the value of this parameter, the structure of the flow is completely modified:

- For high values of m ($m > 4$), we note that the jet remains strongly organized with a weak opening.
- For values of m ranging between 4 and 2, the jet opens gradually, as m increases. The zone of mixture significantly increased.
- For low values of m ($m < 1.5$) the flow becomes strongly disorganized. The swirling structures surrounding the injection zone appear which support the mixture of the fluids injected.

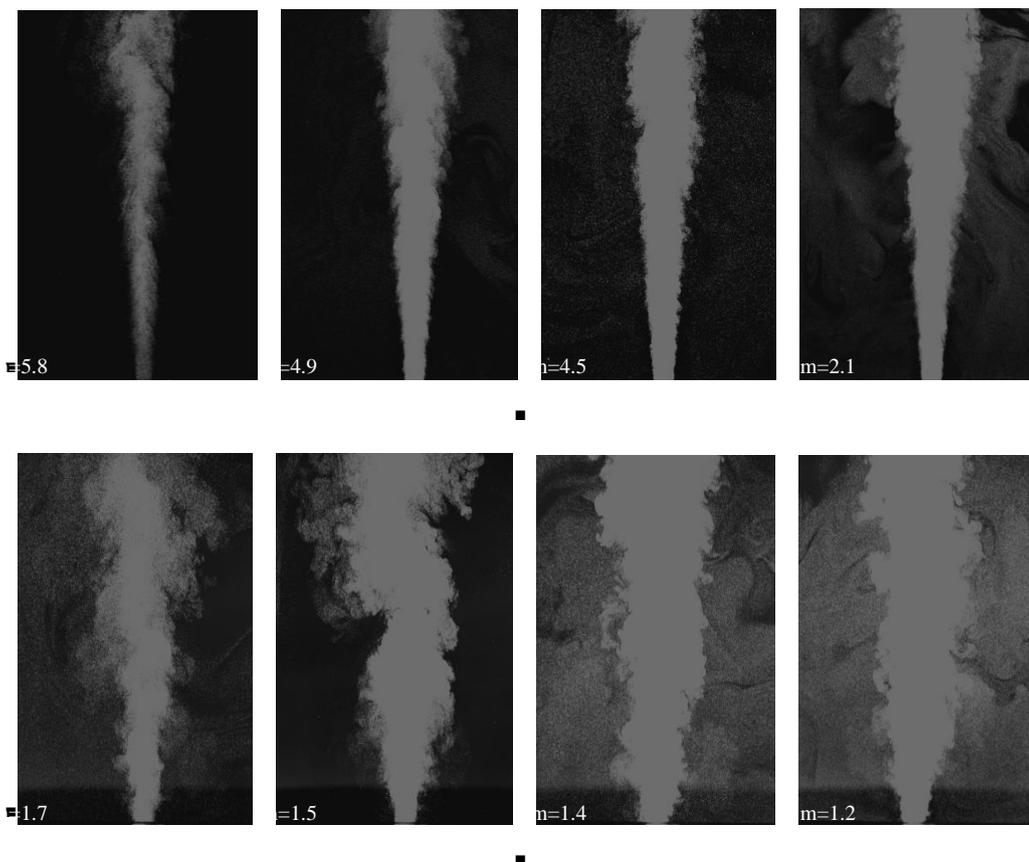


▪ **Fig.4: Evolution of the jets opening according to the parameter m . Visualization by PIV**

In order to characterize quantitatively the turbulent intensity when the annular flow injected increase, figure 5 presents the superposition of the profiles of axial velocity. It is noted that the layer of mixture widens in the zone of transition; this means that the annular layer is closed again around the potential cone as we move away from the exit of the burner.


The first observation is that the rates of the flow are more important in the vicinity close to the edge of injection, and then they start to decrease along the flow according to the height of iso-

surface x . This decrease of the velocity maximum of the central jet is justified by the dissipation of the kinetic energy of the structures which constitute the central flow towards those of the annular jet. Indeed, by viscosity effect, the particles of the central jet with high kinetic energy lose part of this energy towards the particles of the annular jet at low velocity, which in their turn lose their energy towards the particles of the ambient air. This explains well the decrease of the flow rate.

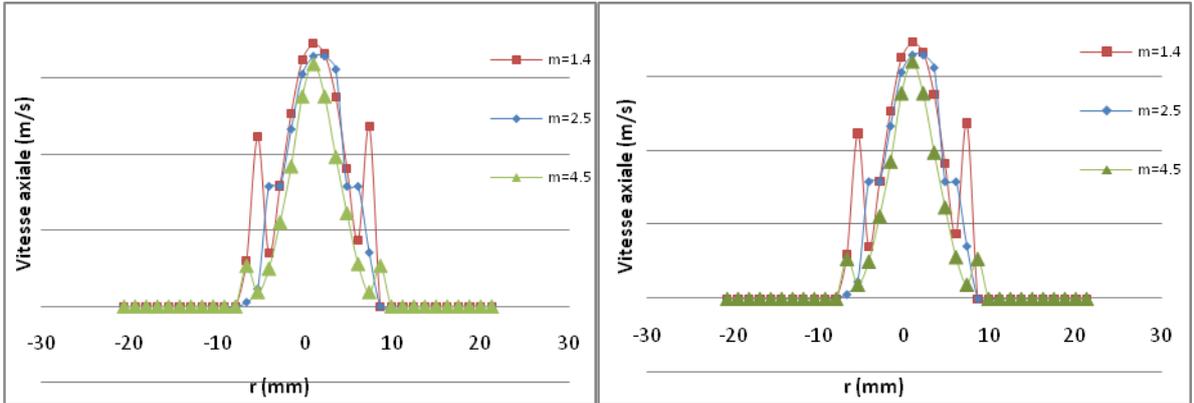


Radial profiles of axial velocity, $x=1.5\text{mm}$

Radial profiles of axial velocity, $x=5\text{mm}$

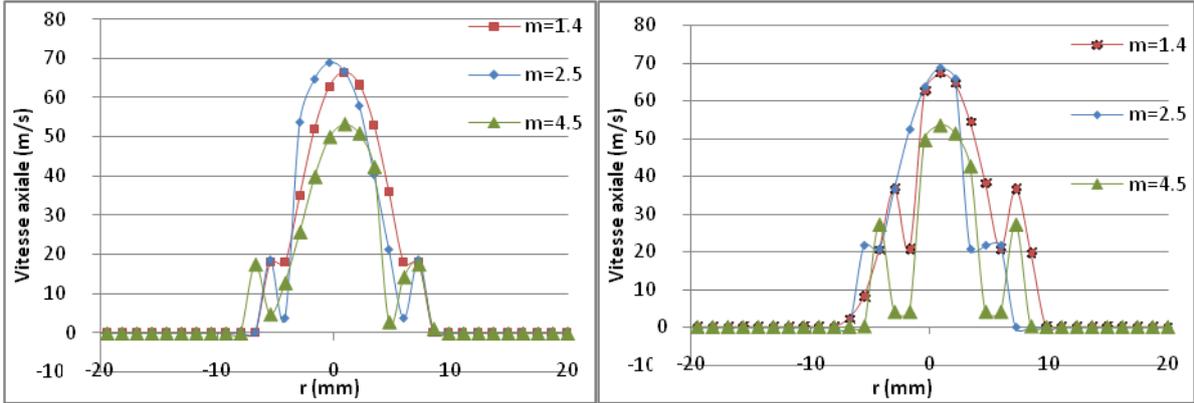

Radial profiles of axial velocity, $x=10\text{mm}$

Radial profiles of axial velocity, $x=50\text{mm}$

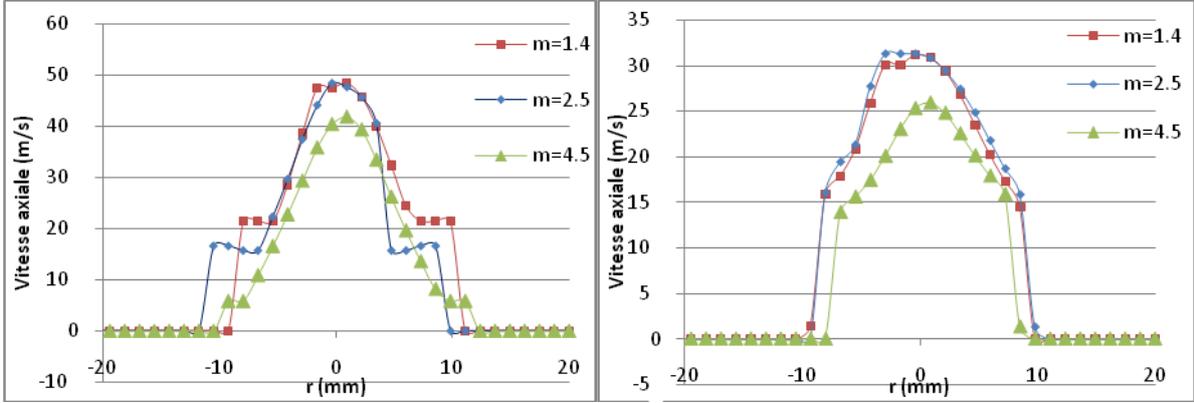

Radial profiles of axial velocity, $x=100\text{mm}$

Radial profiles of axial velocity, $x=150\text{mm}$

Fig.5: Characterization of the non controlled flow

3.3. Characterization of the controlled flow

This part consists in studying the influence of the control on the behavior of the air flow through a coaxial burner. The results obtained by PIV visualization for the two configurations without (CS) and with (SW) control of the flow are represented in the figure 6. Figure 6 shows the influence of various modes of control on the flow ($m= 4.5$, $m= 2.5$ and $m= 1.4$) for the two studied configurations. It is noted that the controlled flow (with Swirl) presents an opening more important than with a simple coaxial flow. This pace remains the same one for all the values of m . We also note that the aperture of the flow is more important when the jet is controlled. This is due to the effect of rotation generated by the obstacles added to the second configuration.

Indeed the controlled flow generates small swirling structures surrounding the annular jet, which increases the turbulence intensity of the flow and thus improves the mixture rate. This phenomenon is developed for low values of m .

This pace is justified by the average profiles rates of the flow at the exit of the burner. We present thereafter the profiles carried out to various values of m , and by modifying each time the height along the flow axis.

According to figure 7, in the close exit of the burner and for high values of m , it is noted that the effect of the control is negligible which contributes to increase the rate of the annular flow, in the mean-time the central flow keep the same values of velocity. When the speeds ratio m decreases, the mean velocities profiles widened: the device starts to be efficient. We can also notice another important component related to the decrease of axial velocity. Indeed, for $m = 4.5$, speed in the center is about 60 m/s. However for $m = 1.5$, it became 25 m/s: control accelerates the decrease of axial velocity, in accordance with swirl flows.

When the height x following the flow axis increases, speed on the flow axis strongly decreases as ratio speeds m increases. That can be justified by the improvement of the turbulence effect around the axis. Thus the intensity of the axial velocity fluctuations increases from where the increase of the turbulence intensity. The mixture layer widens considerably: the objective of the control system is achieved; we support the mixture of the fluids from the two burner jets as well as the mixture with the ambient air. If we move away from the output area of the burner, i.e. for an important value of x , $x = 10$ cm the values of axial velocity increase. This behavior is similar to that obtained without control. The effect of the control decreases then for important heights along the axis. The rotation influence is then

observed in the zone close to the edge of injection, the profile is increasingly broad and average axial velocity takes low values.

When the controlled flow, i.e. the flow of the annular jet becomes important, it becomes difficult to regard the flow as a jet. The radial profiles of average axial velocity in the close exit show not easily interpretable behaviors, strongly disturbed by the presence of the obstacles. Downstream, the profiles with $x = 10$ cm show that the profiles rate of the flow are considerably flattened for low values m . thus, with $m=1.4$, velocity in the center represents only 50% of that in the center of the not controlled flow and the profile are broader.



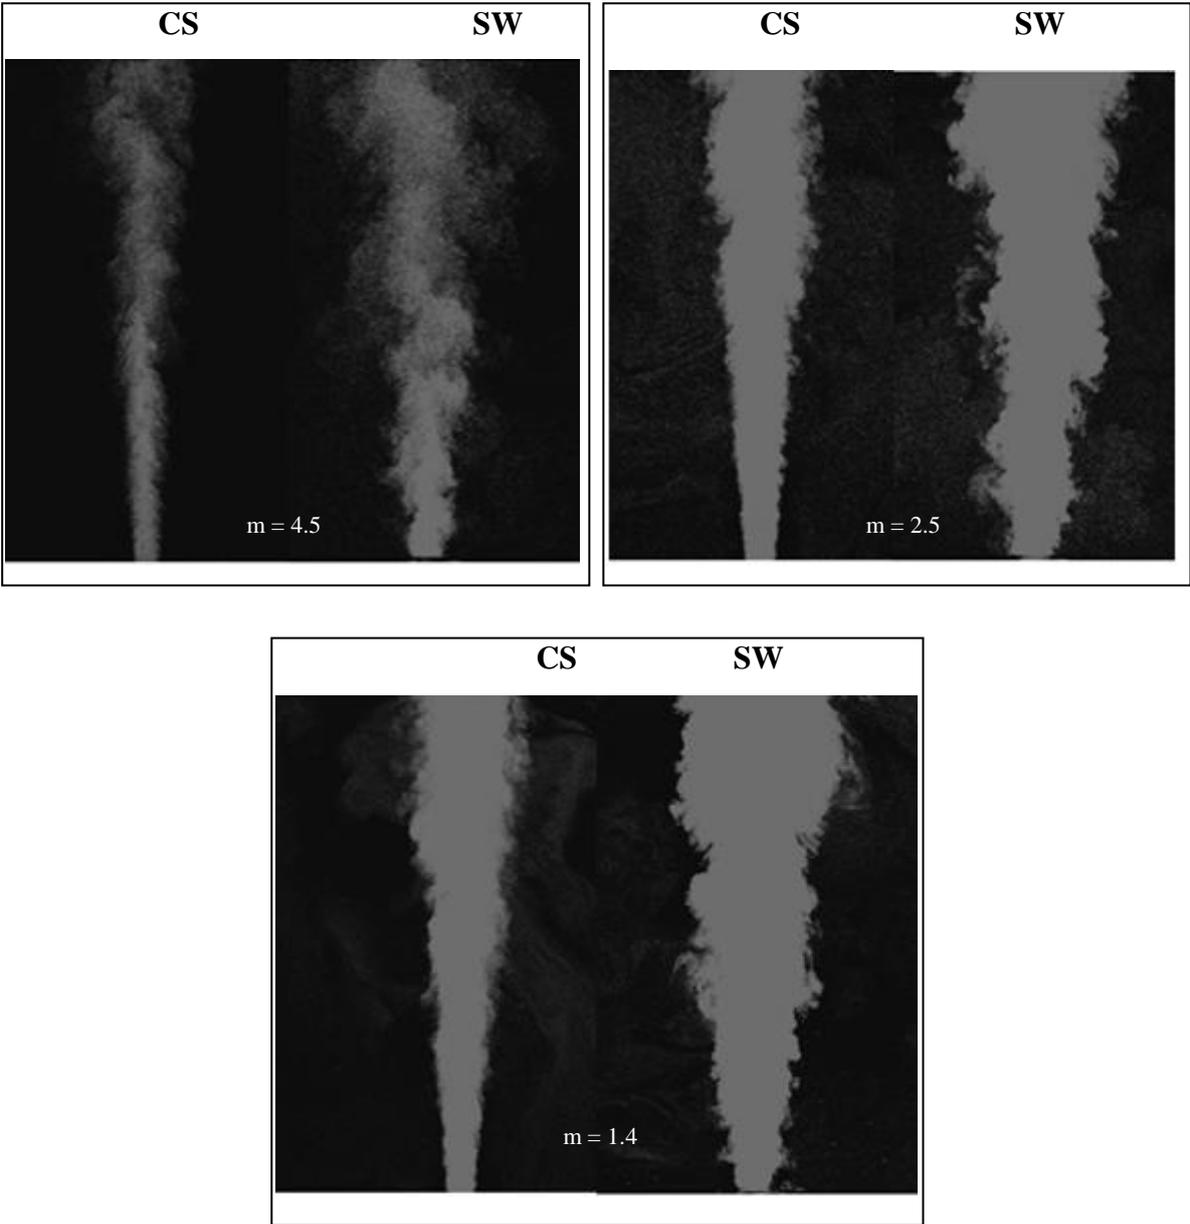



Fig.6: Influence of the control on the jet structure: Visualizations by PIV.

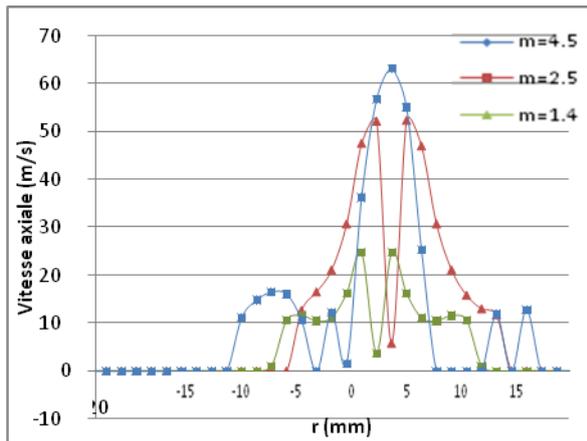


Radial profiles of axial velocity, $x=5\text{mm}$

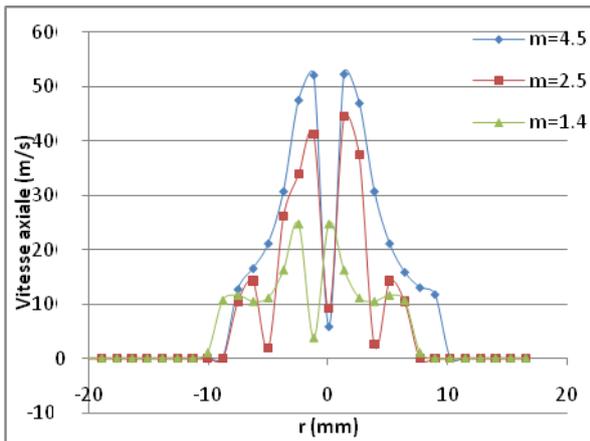

Radial profiles of axial velocity, $x=10\text{mm}$

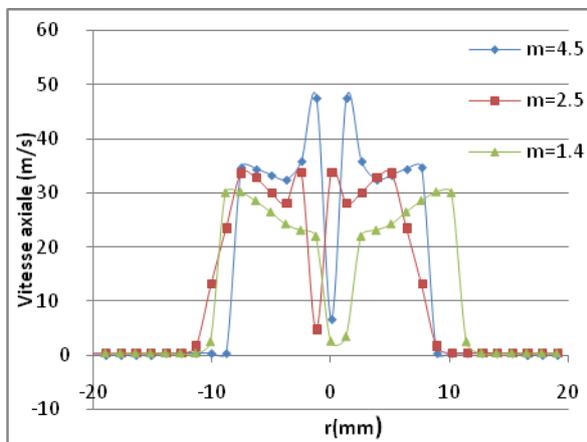

Radial profiles of axial velocity, $x=50\text{mm}$

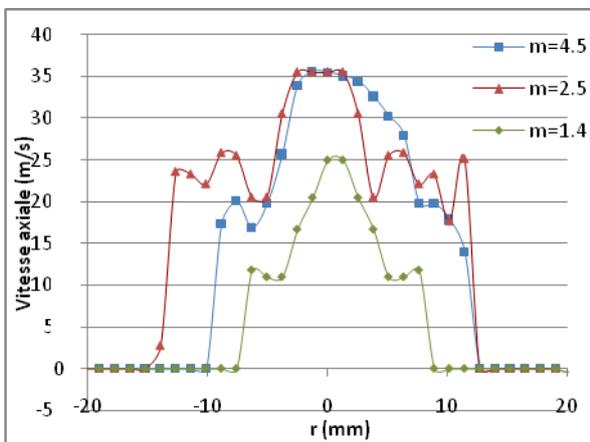

Radial profiles of axial velocity, $x=100\text{mm}$

Fig.7: Characterization of the controlled flow.

4. Conclusion

This paper presents a study on non-premixed flame generated by a burner constituted with a central air jet surrounded by an annular controlled air jet. This controlled jets burner generates a turbulent flow developing in ambient air. The work consisted in mainly characterizing experimentally the influence of the control on the behaviour of the flow. The addition of the obstacles in the annular jet presents double advantages: a better mixture of the fluids from the two burner jets carried out thanks to the increase of the intensity of turbulence and the decrease of axial velocity which contributes to the reduction of the lift-off height and the stabilization of the flame in the reactive case.

This work made it possible to propose the effectiveness of our inspecting device in terms of improvement of the mixture between the two jets as well as the mixture with the ambient air.

An important component to add is that this effect is flexible: more we increase the annular flow injected more we act on the mixture.

Acknowledgements

This work has been supported by the Ministry of Higher Education and Research and by the PHC UTIQUE 12 G 1125 (EGIDE

References

- [1] M. A. Mergheni, T. Boushaki, J.-C. Sautet, G. Godard, H. Ben Ticha, S. Ben Nasrallah, Effects of different mean velocity ratios on dynamics characteristics of a coaxial jet, *Thermal Science*, Vol. 12, No. 2, pp. 49-58, 2008.
- [2] N.W.M. KO, Kwan A.S.H., The initial region of subsonic coaxial jets, *Journal Fluid Mechanics*, 73, 305–332, 1996.
- [3] Ko N.W.M., Au H., Initial region of subsonic coaxial jets of high mean velocity ratio, *Trans ASME, Journal Fluids Engineering*, 103, 335–338, 1981.
- [4] F. Cozzi, A. Coghe, effect of air staging on a coaxial swirled naturel gas flamme, *Experimental Thermal Science*, 43, 32-39, 2012.
- [5] G. N. Li, H. Zhou, K. F. Cen, Emission characteristics and combustion instabilities in an oxy-fuel swirl stabilized combustor, *Zhejiang University Science*, A9, 1582-1589, 2008.
- [6] H. Y. Kim, S.W. Baek, C. Y.. Lee, effects of hybrid reburning system with SNCR and air staging on NO_x reduction and termal characteristics in oxygen-enhanced combustion, *Combustion Science Technology*, 181, 1289-1309, 2012.
- [7] Beér, J. M.; Chigier, N. A. *Combustion Aerodynamics*, Applied Science Publishers, Ltd : London, U. K. 1972, p 264.
- [8] B. Presenti, caractérisation numérique et expérimentale d'un brûleur à gaz à Swirl variable : longueur de flamme, transferts thermiques et production de NO_x, thèse de la faculté de polytechnique de Mons, 2006.
- [9] J. Adjovi, E. Foucault, Stabilité des jets annulaires tournants, Congrès Francophone de Techniques Laser, Toulouse, 19-22 septembre 2006.
- [10] B. Leclaire, Etude théorique et expérimentale d'un écoulement tournant dans une conduite, thèse de doctorat de l'école polytechnique, 21 Décembre 2006.

- [11] V. FAIVRE, Etude expérimentale et numérique du contrôle actif de jets dans des chambres de combustion, Thèse Doctorat de l'Institut National Polytechnique de Toulouse, 15 Décembre 2003
- [12] T. Boushaki, M.A. Mergheni, J.C. Sautet, B. Labegorre, Effects of inclined jets on turbulent oxy-flame characteristics in a triple jet burner, *Experimental Thermal and Fluid Science* 32, 1363–1370, 2008.
- [13] N. Merlo, T. Boushaki, C. chauveau, S. Persis, B. Sarh, I. Gokalp, Combustion characteristics of methaneoxygen enhanced air turbulent non-premixed swirling flames, *Experimental thermal and fluid science*, 56, 53-60, 2014.
- [14] N. Merlo, T. Boushaki, C. chauveau, S. Persis, B. Sarh, I. Gokalp, Experimental study of oxygen enrichment effects on turbulent non-premixed swirling flames, *energy and fuels*, 27, 6191-6197, 2013.
- [15] H. S. Kim, V. K. Arghode, A. K. Gupta, Flame characteristics of hydrogen-enriched methane-air premixed swirling flames, *International journal of hydrogen energy*, 34, 1063-1073-2009.
- [16] BSA Flow Software V. 2.1 Dantec, Installation & User's guide.